


Our DC rated contactors are designed for use with DC motor and drive applications. They can also be used on a variety of other DC applications. Our DC rated contactors come standard with 2 normally open (NO) power contacts and 1 normally closed (NC) power contact for dynamic braking applications. They also include 2 NO and 2 NC auxiliary contacts. All units are supplied with 120VAC, 50/60Hz rated coils.

Available Models

Part Number	Rated Voltage	Rated Current	Height	Width	Depth
REL2023-00	500VDC *	50A	4.25"	3.5"	4.25"
REL2023-01	500VDC *	90A	6.0"	4.2"	5.4"
REL2023-02	500VDC *	160A	7.1"	4.8"	5.7"
REL2023-03	500VDC *	260A	8.1"	5.5"	6.9"
REL2023-04	500VDC *	360A	9.7"	6.5"	8.1"

* Rated 500VDC for SCR power source and 440V for class 2 and 4 power supplies

ELECTRICAL

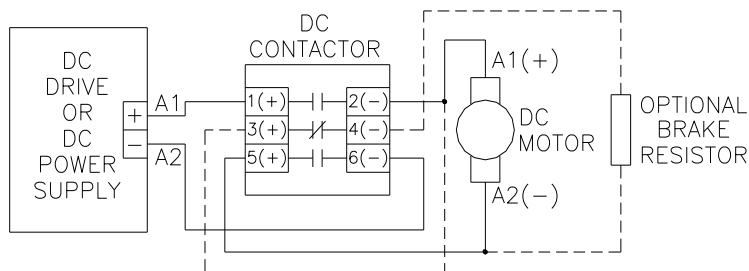

Typical DC Motor and Drive Application

Carotron Inc,
 3204 Rocky River Road
 Heath Springs, SC 29058
 Phone: 888-286-8614
 Fax: 800-286-6063
www.carotron.com